

H1-315240IW-WND

Detailed Description

Performance

Lamp	Number	1
	Watts	315W
InputVolts		240V
Input Power		343W
Normal Line Amps		1.43A
Min Power Factor		0.95
THD		<15%
Crest Factor		<1.7

Physical

Case Length	193mm	7.60"
Case Width	236mm	9.29"
Height	468mm	18.43"
Mounting Length	181mm	7.13"
Mounting Width	65mm	2.56"
Weight	3.5kg	7.72lb

Protections

- 1.End of Lamp Life(EOL)Protection
- 2.Short circuit protection
- 3.Open circuit protection
- 4.Ignition failure protection
- 5.Thermal protection.


Installation & Application Notes

- 1.Max. allowable case temperature:80°C/176°F.
- 2.Ambient Temperature:-30...+55°C/-22...+131°F.
- 3.Ignition voltage is 5kV max.
- 4.Power must be cycled off-then on,after replacing the lamp.


Performance Requirements:

Rated mains voltage:	240V
Voltage range (+/-10%):	216-264V
Mains frequency:	50/60Hz
Operation frequency (typical):	140-220Hz

Main Dimension

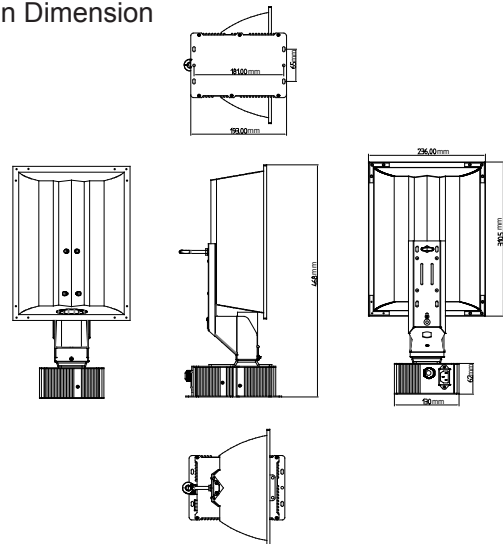

Wiring Diagram

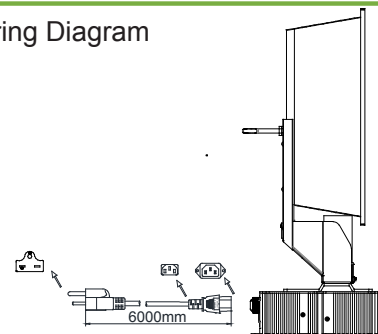

Ballast Case must be Grounded

Tcase max=80°C/176°F

